

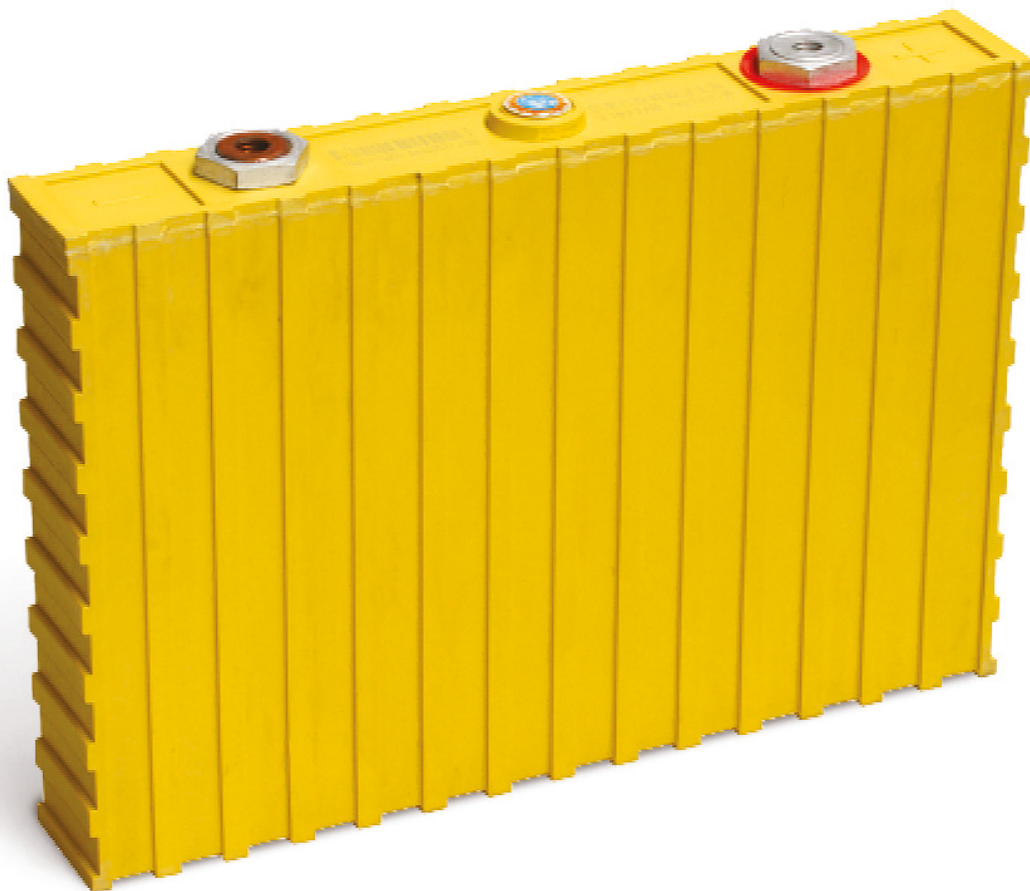


WINSTON LFP200AHA cell

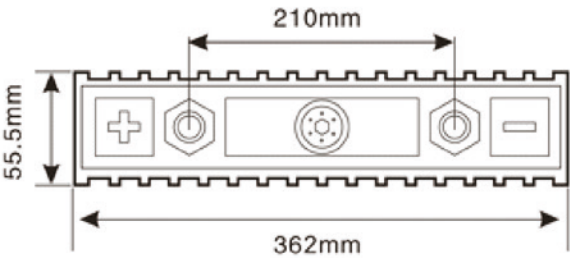


Winston LFP200AHA cell


Specifications		
Model name	LFP200AHA	Alternative product marking TS-LFP200AHA, WB-LYP200AHA
Nominal voltage	3.3 V	Operating voltage under load is 3.0 V
Capacity	200 AH	+/- 5%
Operating voltage	max 3,8V - min 2.8V	At 80% DOD
Deep discharge voltage	2.5 V	The cells is damaged if voltage drops bellow this level
Maximal charge voltage	4 V	The cells is damaged if voltage exceeds this level
Optimal discharge current	< 100 A	0.5 C
Maximal discharge current	< 600 A	3 C, continuous for max 15 minutes from full charge
Max peak discharge current	< 2000 A	10 C, maximal 5 seconds in 1 minute
Optimal charge current	< 100 A	0.5 C
Maximal charge current	< 600 A	< 3 C with battery temperature monitoring
Maximal continuous operating temperature	65 °C	The battery temperature should not increase this level during charge and discharge
Dimensions	256 X 362 X 55,5	Millimeters (tolerance +/- 2 mm)
Weight	7,9 kg	Kilograms (tolerance +/- 150g)
Optimal torque force	24 - 26 Nm	

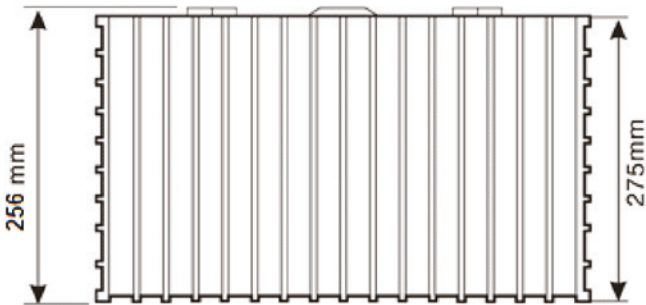


不同環境溫度下LYP類電池的放電特性曲線
Discharge characteristic curve of LYP type battery under different ambient temperature

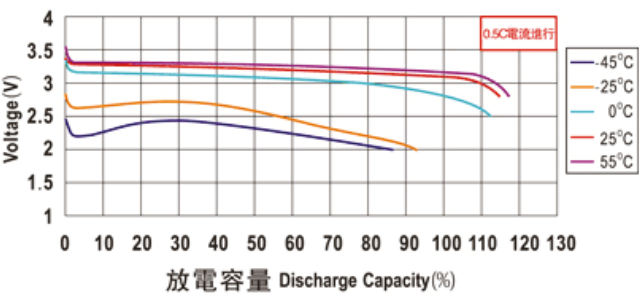

常溫下LYP類電池的放電特性曲線
Discharge characteristic curve of LYP type battery under normal temperature

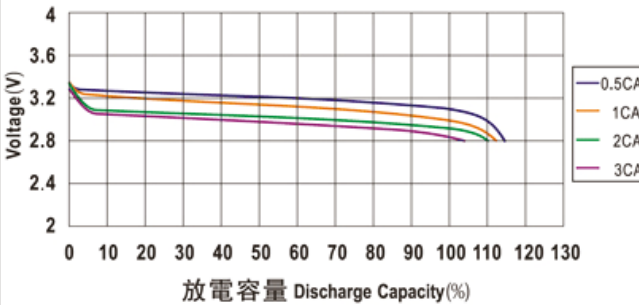

常溫下LYP類電池的充電特性曲線
Charge characteristic curve of LYP type battery under normal temperature

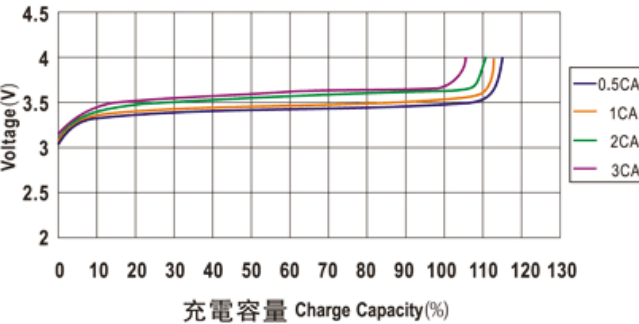

在常溫下LYP類電池的存儲特性曲線
Storage characteristic curve of LYP type battery under normal temperature

